

F TYPE ACRYLIC BENDER

Acrylic hot bender makes writing more convenient

Simple operation

user friendly design

environment protection



THREE SPECIAL DESIGNS

Increase experience



Adjustable
temperature



Safety and
energy saving




Rapid
prototyping

DETAILS PRODUCT DISPLAY

• • •

Excellent strength and quality assurance

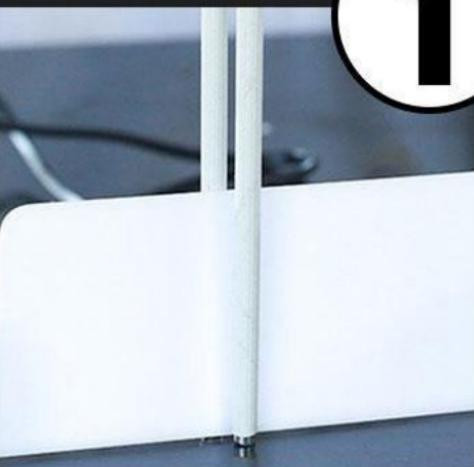

3

5A thyristor thermostat and switch

Thyristor thermostat is used to prevent excessive temperature



4



Adjust the height of the balancer before use

Assemble the thermostatic sleeve with uniform heating and no scalding

ALUMINUM BLOCK HEAT DISSIPATION



Aluminum block is used at the tail of the heating rod, which has better heat dissipation effect.

DETAILS

PRODUCT PARAMETERS



Excellent strength and quality assurance

Product power: 150W


Input voltage: 220v


Bend width: 100mm

Bending thickness: 2-4mm (organic plate, PVC, acrylic plate)

DETAILS EFFECT DISPLAY

Excellent strength and quality assurance

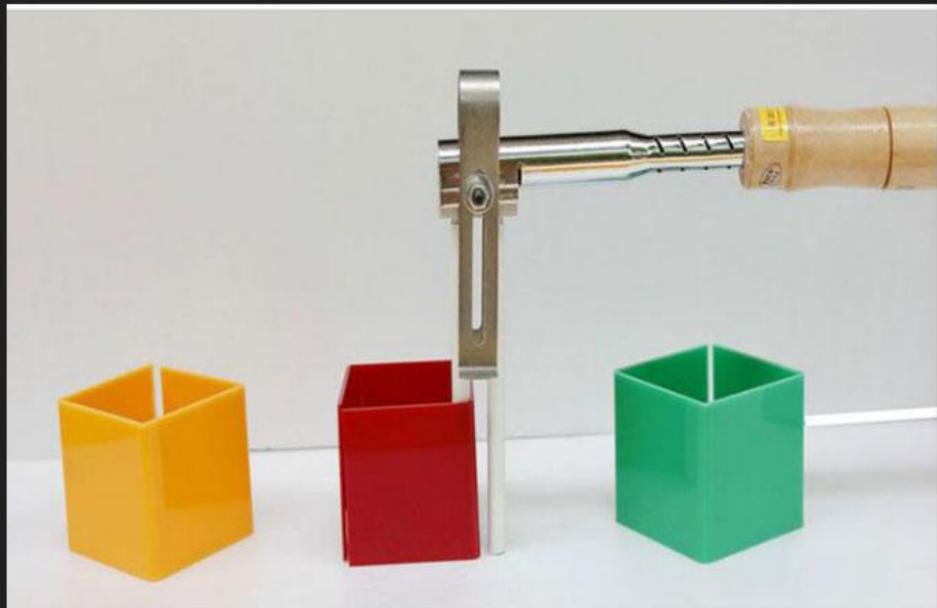

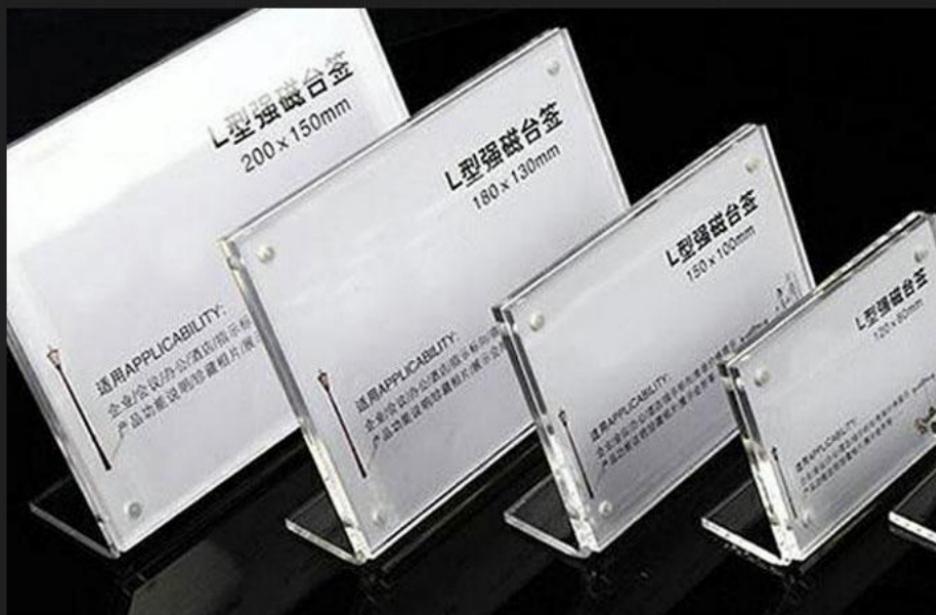


DETAILS

PRODUCT APPLICATION



Excellent strength and quality assurance

Acrylic plate



PVC



Organic board



Luminous word



Main uses: for fast bending and softening of various thermoplastic materials! For example: hot bending of acrylic and PVC parts and bending of acrylic luminous word surround, etc
It is applicable to a wide range of materials, such as acrylic board, organic board, PC material and various thermoplastic PC materials.