

8218 INJECTION LED MODULES

Quality | Bright | Waterproof

2835 CHIP ——— //



PRODUCT ADVANTAGES

FAMOUS BRAND, GOOD QUALITY



Optical lens



Highlight LED



IP67



Mild
color rendering




Safety
eye protection



Scientific
heat dissipation

Four guarantees

Strong strength is worth choosing

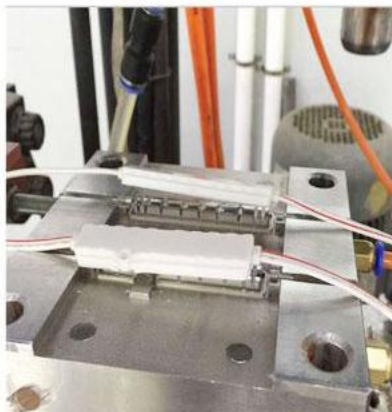

Source manufacturer



Spot delivery



Quality assurance



Professional team

Product details


LED lights up after soaking in water, and everything is still normal

Fearless of Rainstorm Weather IP65 engineering protection grade

//
No fear of wind and sun, meeting the needs of outdoor use

Waterproof immersion test

We are higher than the waterproof standard.
Don't worry about rain and humidity
This is a truly waterproof LED module

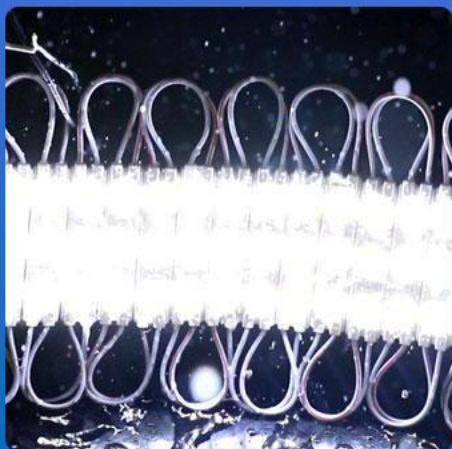

LED lights up after soaking in water,
and everything is still normal

LED lights up after soaking in water, and everything is still normal

Optical lens

With good chips and bright light beads, the lighting effect is good and the service life is long




Integrated injection molding waterproof

Waterproof, rainproof, snow proof, frost resistant, and can be used in extreme weather

3M back glue

Full cover 3m adhesive tape with excellent performance

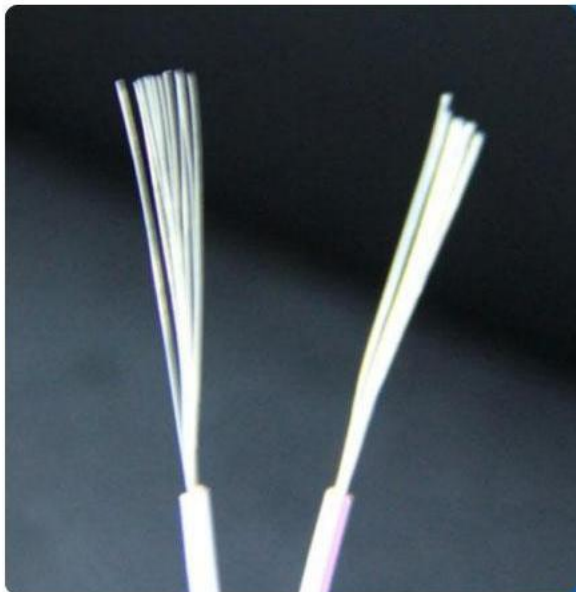

Integrated injection molding waterproof

Waterproof, rainproof, snow proof, frost resistant, and can be used in extreme weather


Stable output

//

One model has two resistors, and the output is more stable



Product parameters

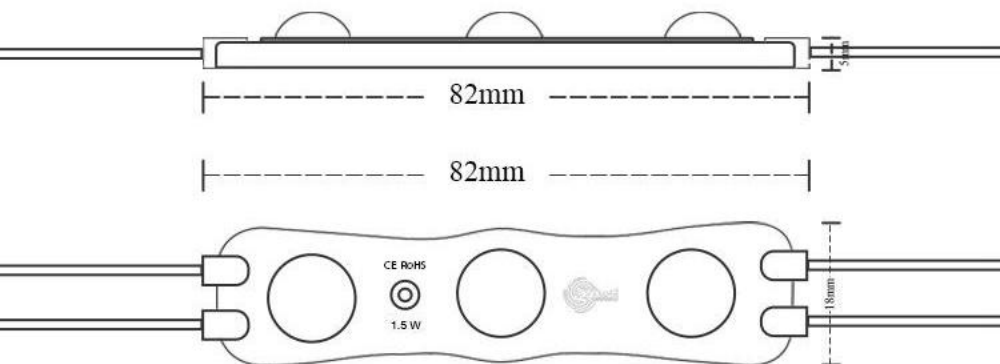

Product model : HT-8218

Power: 1.5W




Length between module: 7cm

Guarantee: 5 Year


Shell: 100% Pure ABS

Adhesive Tape: full cover PET tape (6 cm width)

Product display

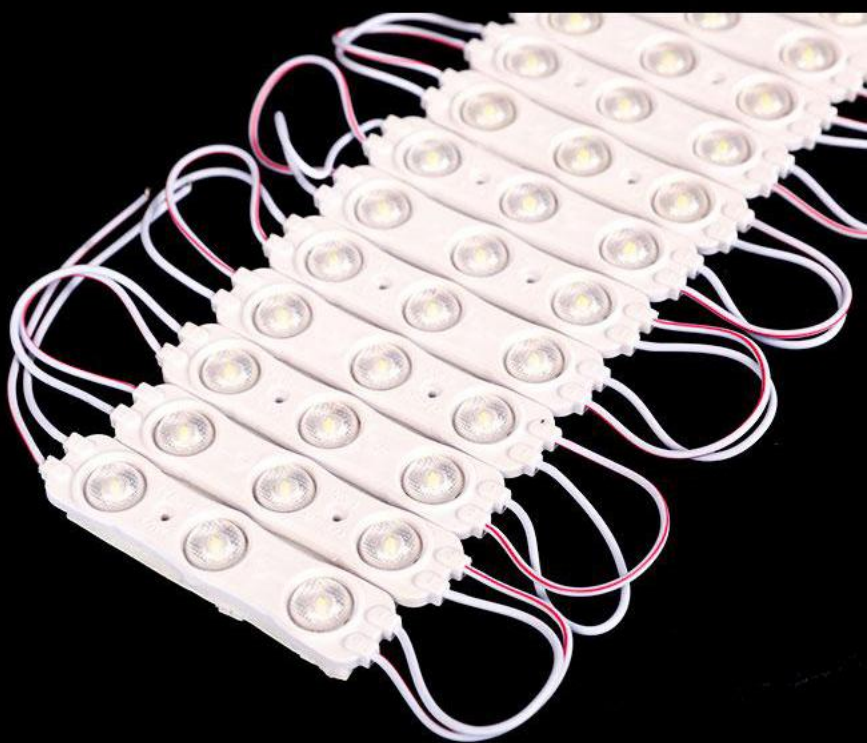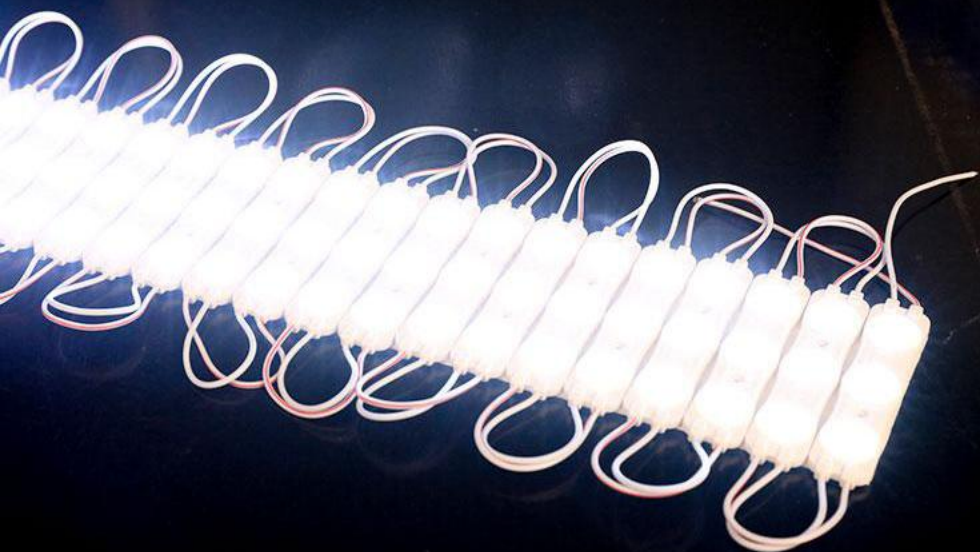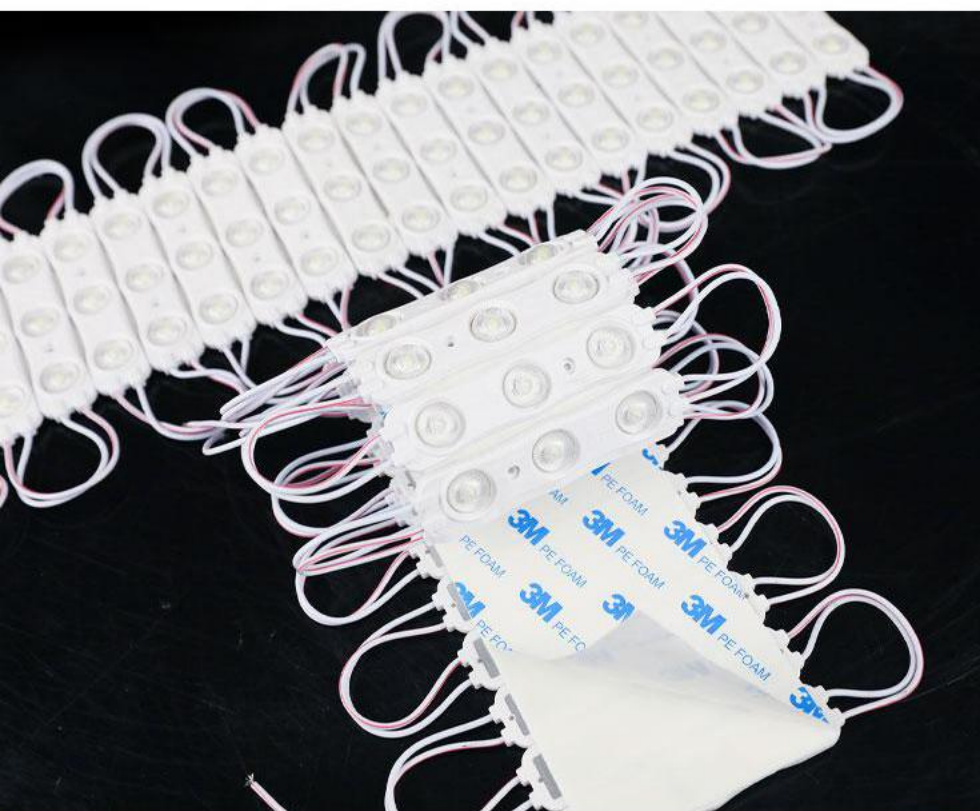

Installation diagram

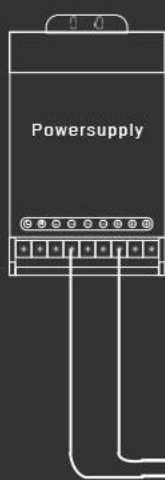

Power mainline usage $2 \times 1.5\text{mm}^2$ If the power line of the straight bar lamp needs to be lengthened, the above cable must be $0.75\text{mm}^2 / 18 \#$ wires of above specifications, so as to avoid excessive heating of the power line caused by overload and adverse consequences. The length of the power line between the switching power supply and the straight bar lamp shall not exceed 3 meters, otherwise the line loss will increase and the total power will increase;

Effect display

